

## Machine details

<b>Name</b>	Electric press 60 tons
<b>Item Number</b>	272
<b>Manufacturer</b>	קנט-לי
<b>Type</b>	
<b>Available from</b>	Immediate
<b>Quality</b>	Like New
<b>Location</b>	Moshav Ganot

## Description

Electric / manual pressurizer up to 60 tons pressing  
In new mode  
Opened to a height of 1040 mm  
Minimum closure 268 mm

## Costs

<b>Auction Fee</b>	15%
<b>VAT</b>	VAT Not Included
<b>Delivery Terms</b>	loading factory gate by the buyer
<b>Cost Loading</b>	NIS
<b>Shipping costs</b>	
<b>Payment terms</b>	Full payment before collection

## Technical details

<b>Dimensions</b>	1085 x 1850 x 700 mm
<b>Weight</b>	kg

## Contact details

<b>Name</b>	גונן שרוני
<b>Phone</b>	

**Fax**

**Mobile**

0526697736

**Email**

pombit.com@gmail.com


[Gallery](#)





### Operating Instructions

1. Fill adequate hydraulic oil in to the pump station's oil tank to the level of gauge. Do NOT operate the oil pump with no oil, a low oil or in reverse rotation.
2. Be careful to connect the delivery port of pump station with the cylinder's inlet and outlet as marked in the direction containers with the operation's instruction.
3. DO NOT operate the compressor when the worktable latch is normally open position the worktable beam.
4. When working load "forces" to it of oil compressor's rated load, the distance between supporting points on the worktable panel must be 5 times greater than the worktable beam's width across transverse direction and it's size is greater than the worktable beam's length in longitudinal direction.
5. The compressor's rated pressure must be 20% of the rated load before delivery. The user is allowed to gradually adjust the pressure to its original compressor qualified for long time.
6. Please refer to the Operator's Manual for details.

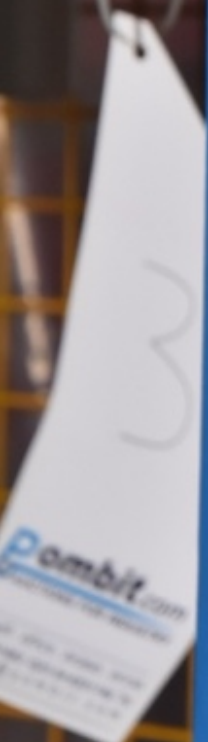

Control panel with the following components:

- POWER LAMP: A green indicator light.
- START: A green push-button.
- EMERGENCY STOP: A red mushroom-shaped button with a key inserted.
- STOP: A red push-button.
- A silver emergency stop button with a circular symbol.

